



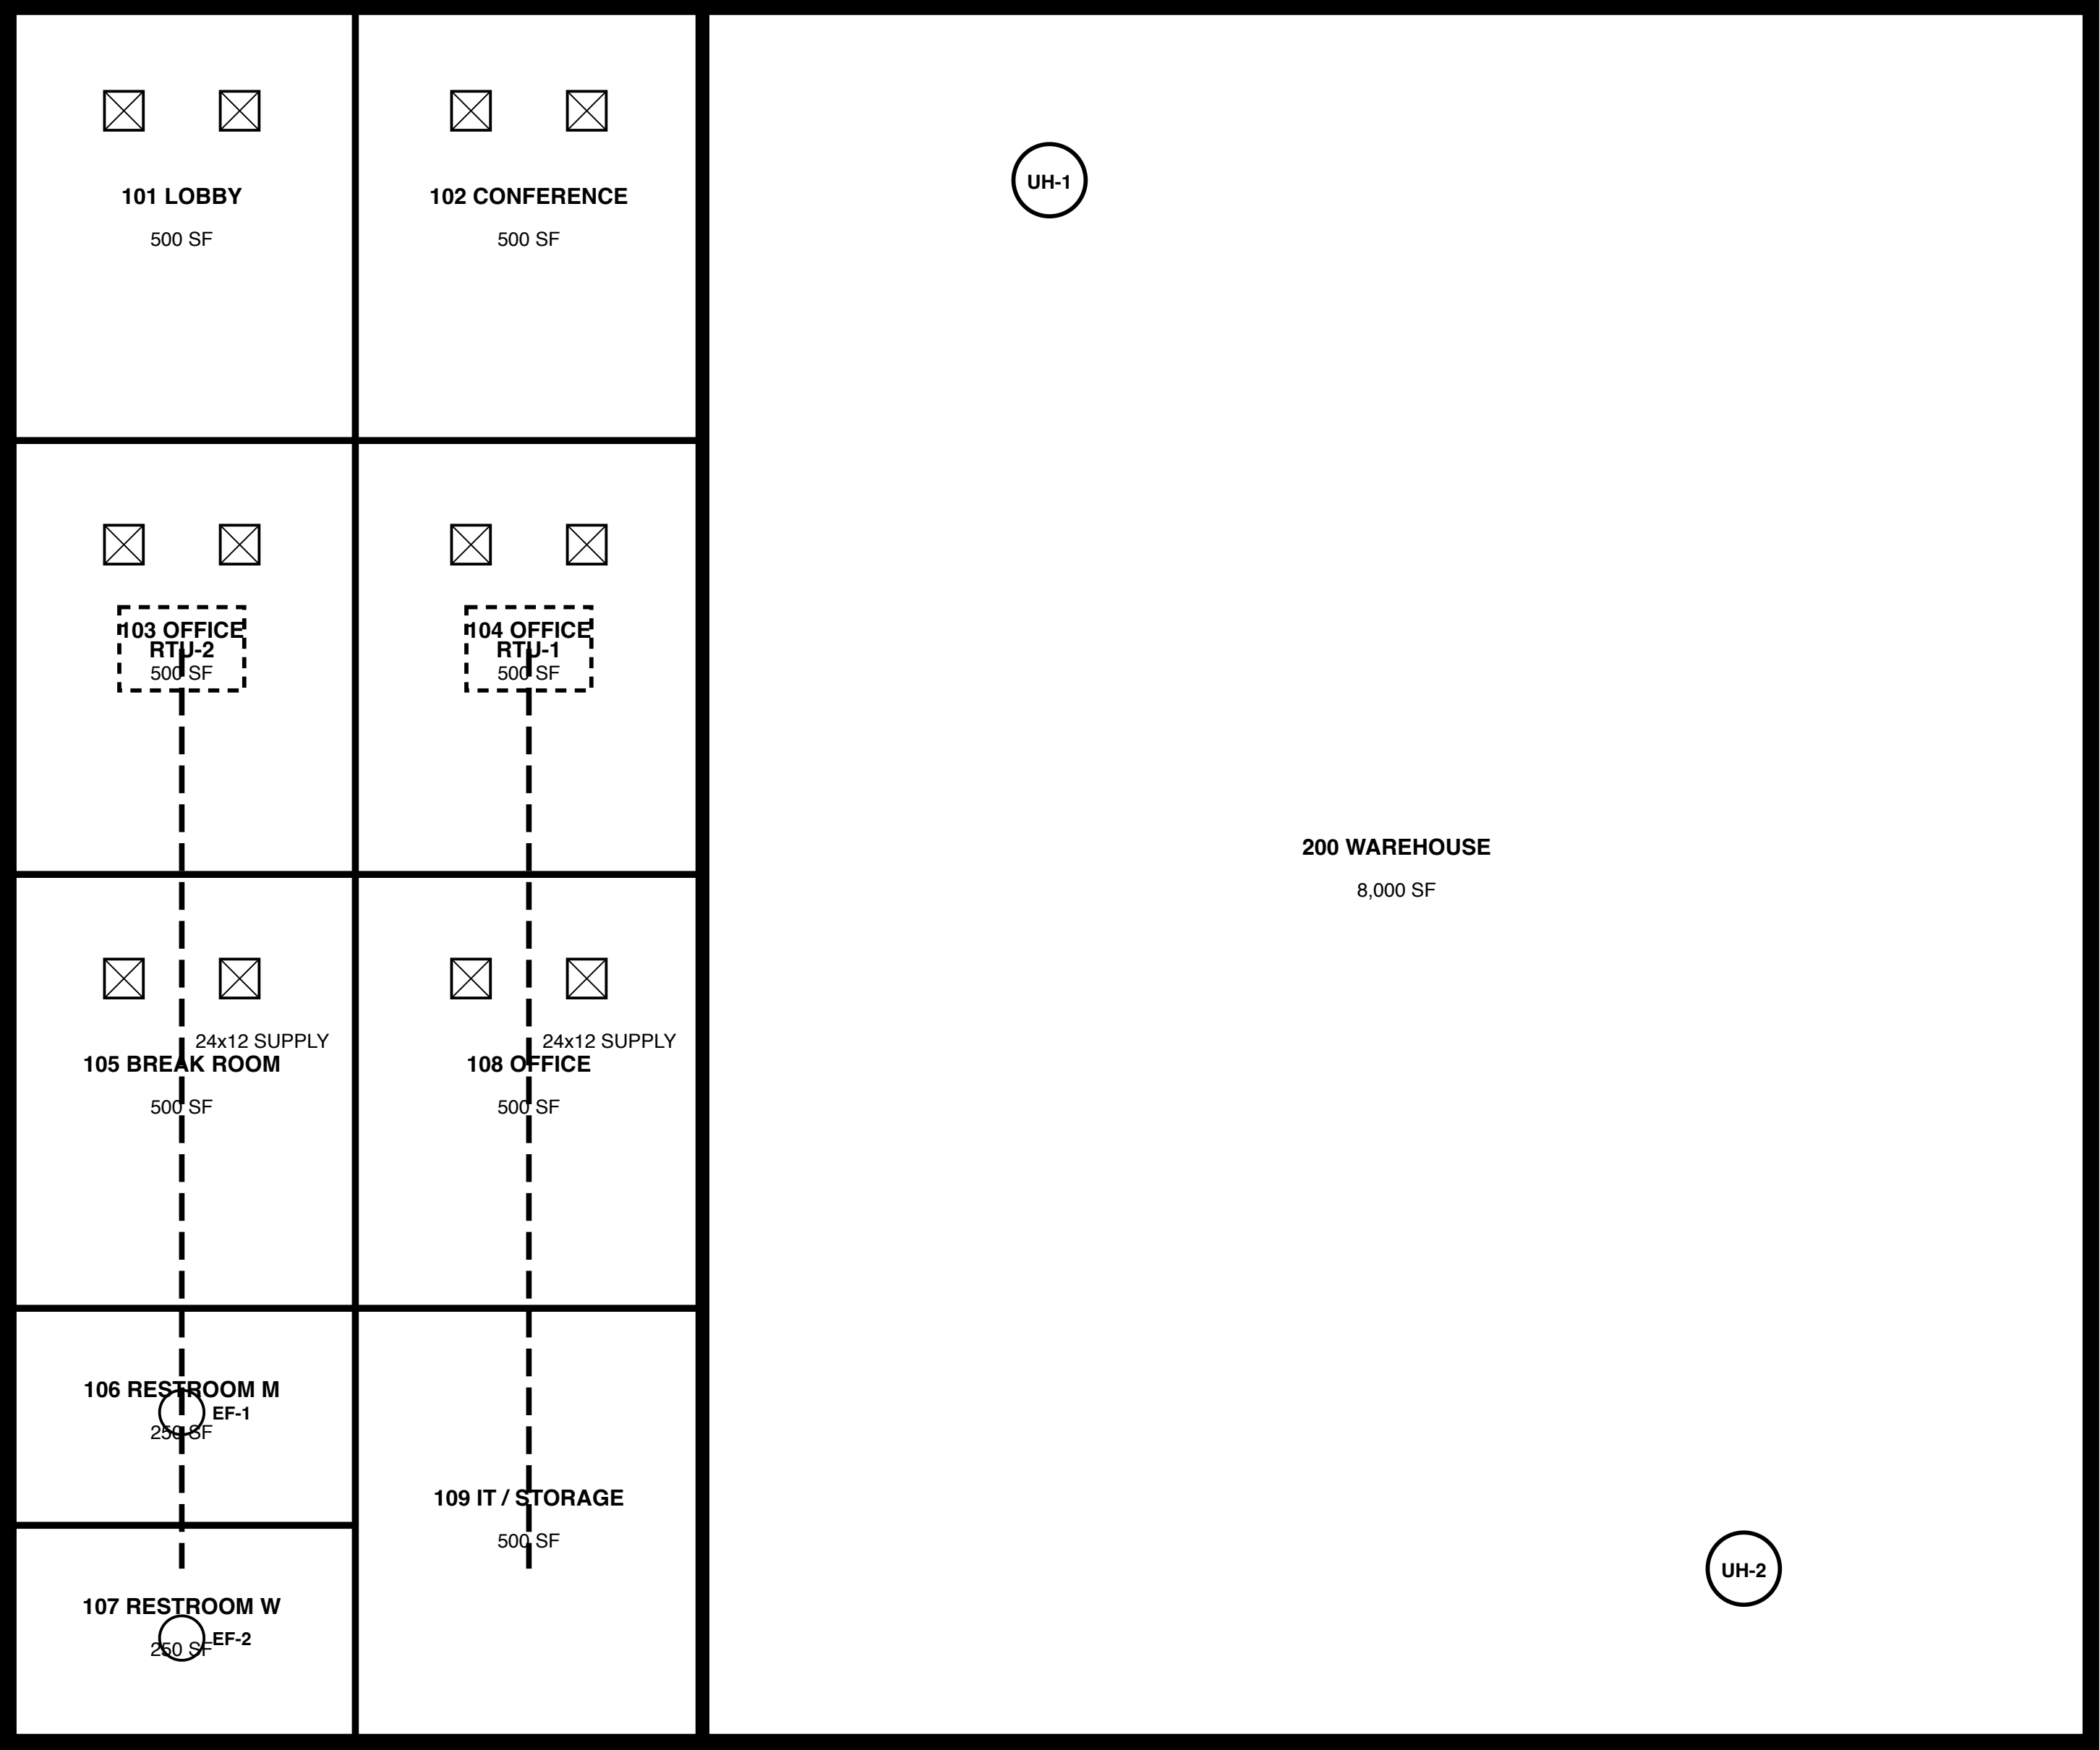

HVAC EQUIPMENT SCHEDULE

| TAG   | TYPE                  | CAPACITY           | ELECTRICAL | LOCATION     |
|-------|-----------------------|--------------------|------------|--------------|
| RTU-1 | PACKAGED ROOFTOP UNIT | 7.5 TON / 3000 CFM | 460V/3PH   | OFFICE EAST  |
| RTU-2 | PACKAGED ROOFTOP UNIT | 7.5 TON / 3000 CFM | 460V/3PH   | OFFICE WEST  |
| UH-1  | GAS UNIT HEATER       | 150 MBH            | 120V/1PH   | WAREHOUSE    |
| UH-2  | GAS UNIT HEATER       | 150 MBH            | 120V/1PH   | WAREHOUSE    |
| EF-1  | CEILING EXHAUST FAN   | 150 CFM            | 120V/1PH   | RESTROOM 106 |
| EF-2  | CEILING EXHAUST FAN   | 150 CFM            | 120V/1PH   | RESTROOM 107 |

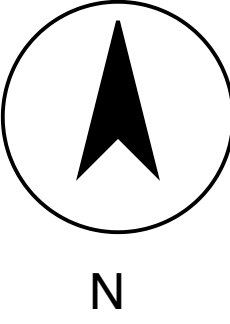

MECHANICAL NOTES

- SUPPLY DIFFUSERS: 24x24 LAY-IN, QTY 12; RETURN GRILLES 24x24 QTY 6 (NOT SHOWN).
- DUCTWORK: GALVANIZED, SMACNA 2" WG; LINED 10' FROM RTUs; APPROX. 640 LF TRUNK/BRANCH.
- GAS PIPING TO UH-1, UH-2 AND WH-1 BY PLUMBING CONTRACTOR; SEE P-101.
- CONTROLS: PROGRAMMABLE THERMOSTATS; NO BMS. TAB PER 23 05 93.
- ROOF CURBS 14" BY MECHANICAL CONTRACTOR; STRUCTURAL FRAMES BY STEEL FABRICATOR (S-201).

|                                             |                  |
|---------------------------------------------|------------------|
| BLACKLAND COMMERCIAL BUILDERS (SYNTHETIC D) |                  |
| PRAIRIE CREEK OFFICE/WAREHOUSE — BUILDING 2 |                  |
| SHEET TITLE<br>HVAC PLAN & SCHEDULES        |                  |
| SCALE: 1/8" = 1'-0"                         | DATE: 09/12/2026 |
| REV: 2 ADDENDUM 1: 09/19/2026               |                  |
| SHEET NUMBER                                | M-101            |