



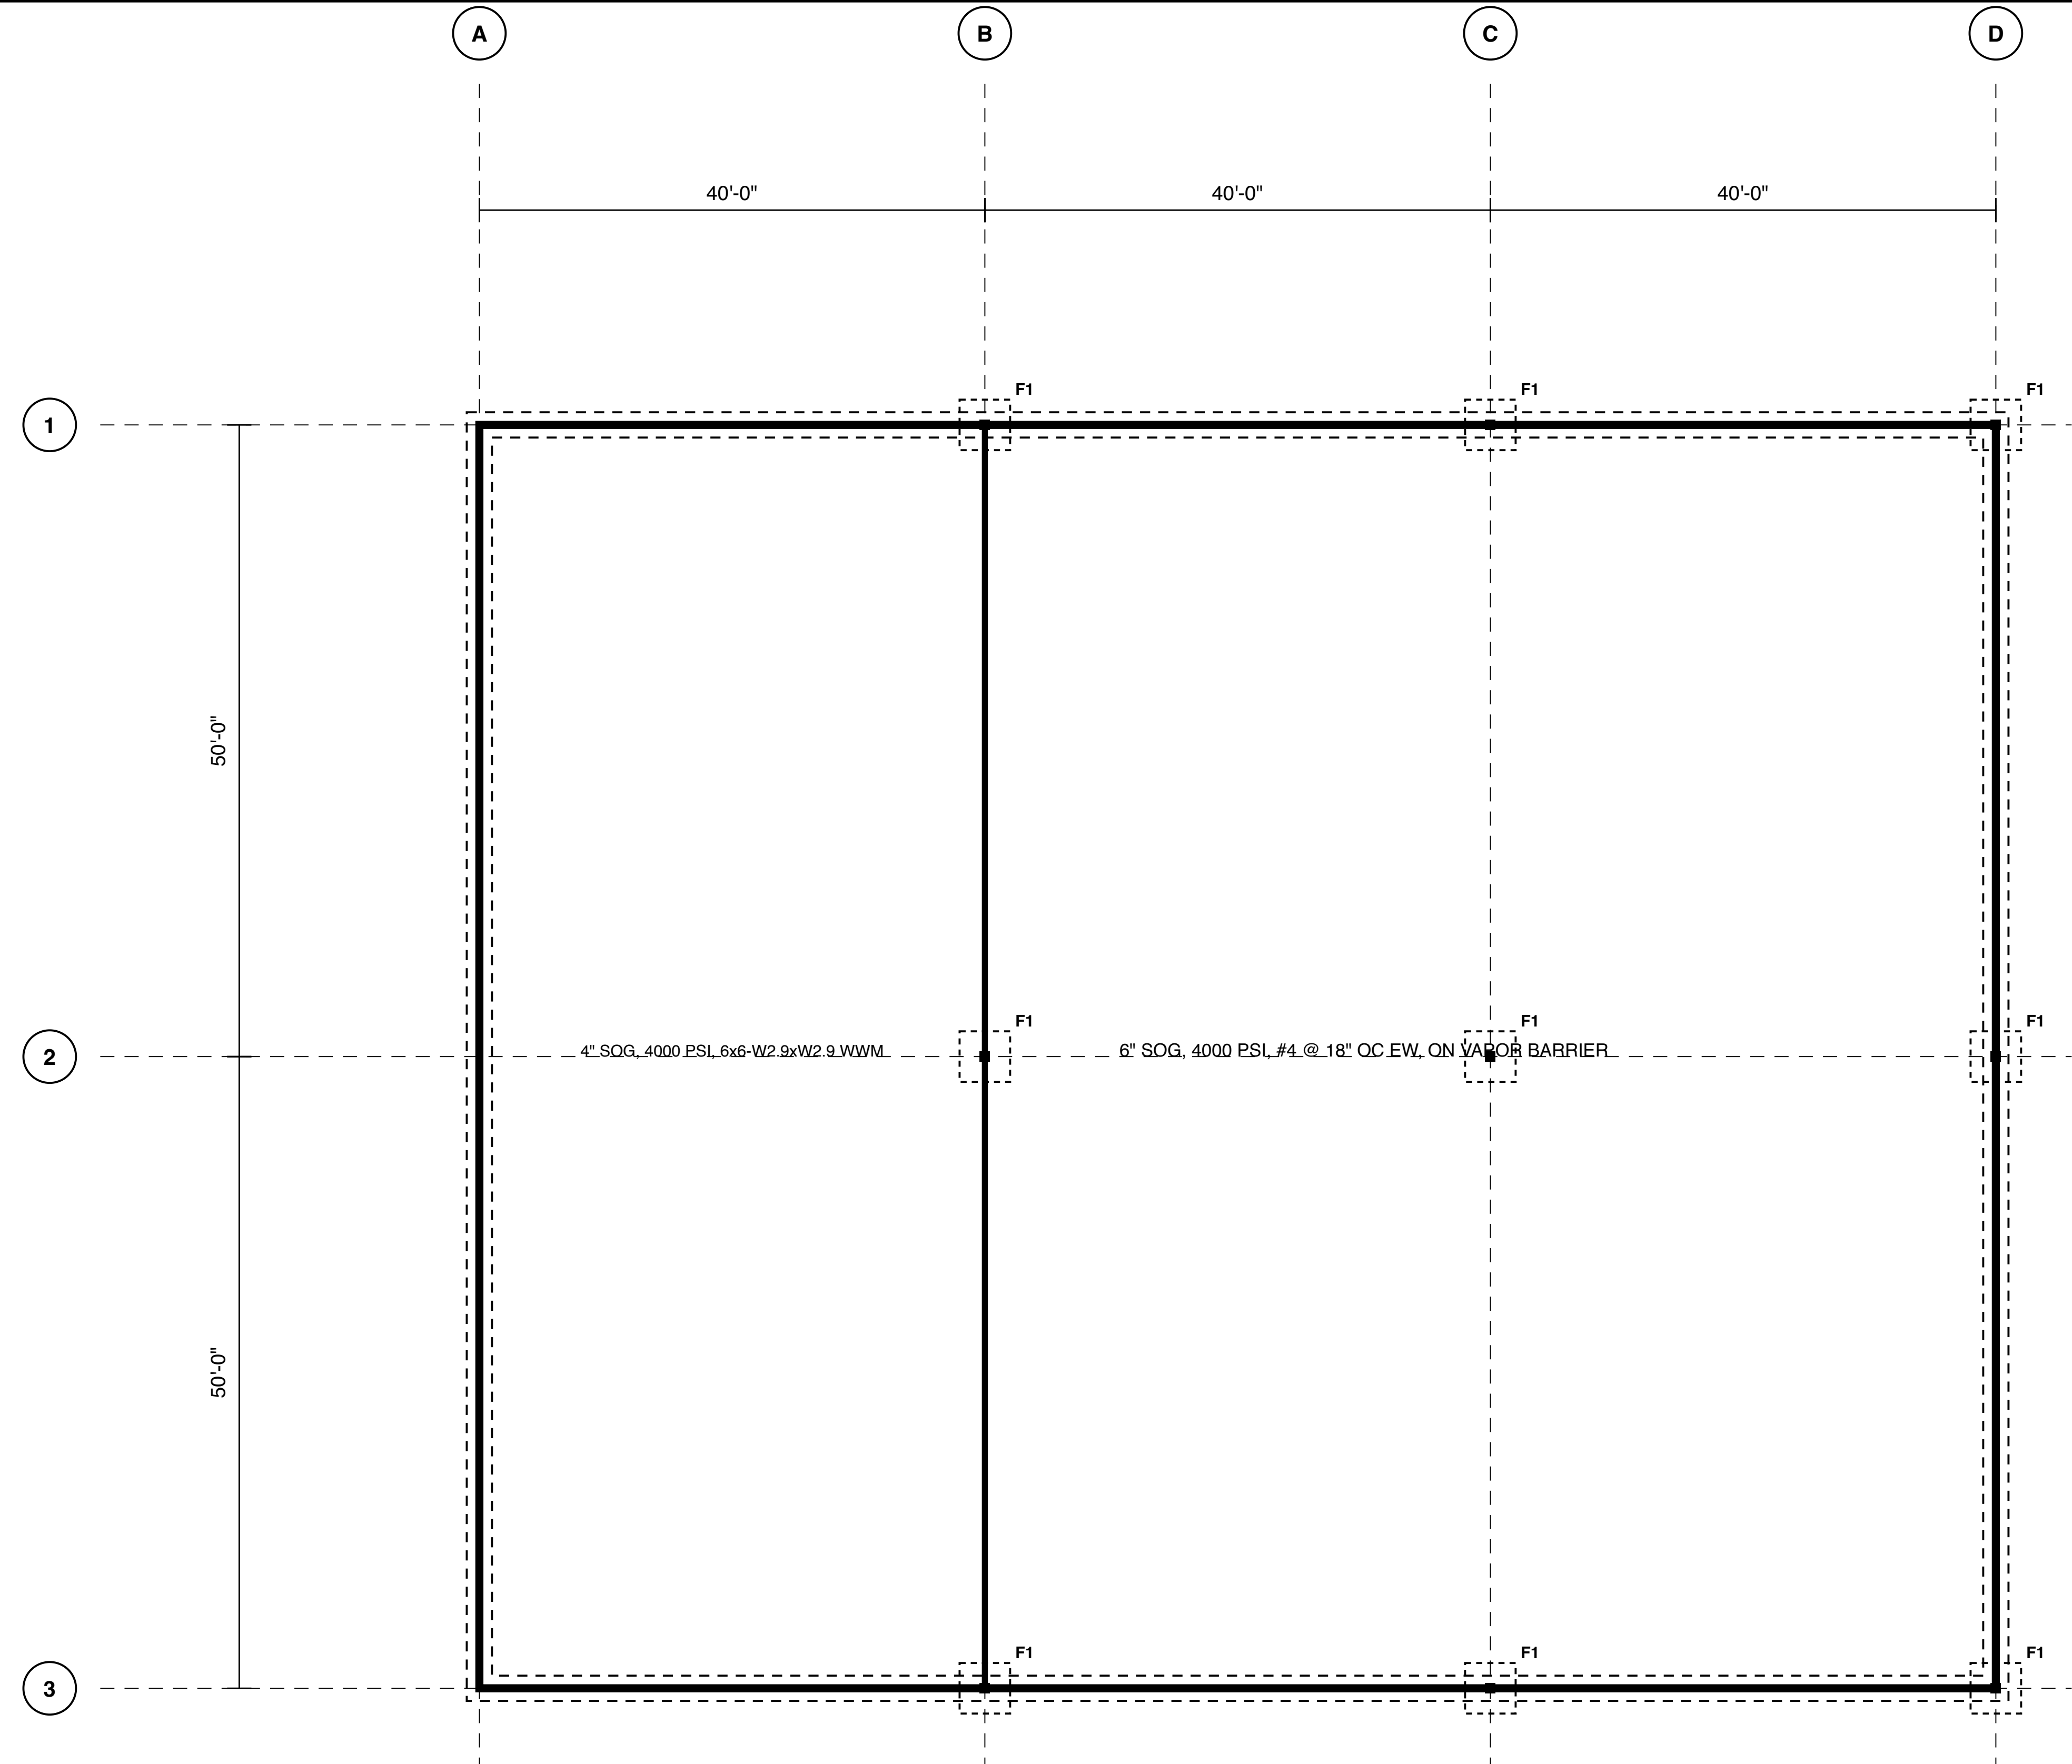

STRUCTURAL GENERAL NOTES

- 1. CODES: IBC 2021; ASCE 7-22. ROOF LL 20 PSF; WIND 115 MPH EXP C; SEISMIC SDC A.
- 2. CONCRETE: $f'_c = 4,000$ PSI AT 28 DAYS ALL FOOTINGS AND SLABS; 3,000 PSI FILL.
- 3. REINFORCING: ASTM A615 GR 60. WWM ASTM A1064.
- 4. CMU: ASTM C90, $f'_m = 2,000$ PSI, TYPE S MORTAR, GROUT ALL CELLS SOLID; #5 @ 32" OC VERT.
- 5. STRUCTURAL STEEL: W-SHAPES ASTM A992; HSS ASTM A500 GR C; JOISTS SJI K-SERIES; DECK ASTM A653.
- 6. BEARING: 3,000 PSF ALLOWABLE PER GEOTECH REPORT (TERRA-TEX 26-1188); FOOTINGS 24" MIN BELOW GRADE.
- 7. SPECIAL INSPECTIONS PER IBC CH. 17: CONCRETE, MASONRY, STEEL BOLTING/WELDING — SEE 01 45 00.
- 8. SLAB CONTROL JOINTS AT 12'-0" OC MAX EACH WAY, SAW CUT 1/4 DEPTH.

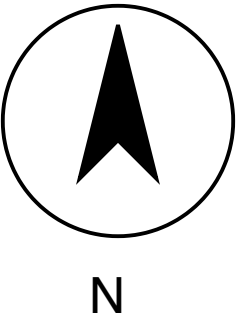

FOOTING SCHEDULE

MARK	SIZE	REINF.	QTY
F1	4'-0" x 4'-0" x 1'-6"	(6) #5 EA WAY	9
F2	CONT. 2'-0" x 1'-0"	(3) #5 CONT.	440 LF

BLACKLAND COMMERCIAL BUILDERS (SYNTHETIC DRAINAGE)
PRAIRIE CREEK OFFICE/WAREHOUSE — BUILDING 2

SHEET TITLE
FOUNDATION PLAN & GENERAL NOTES

SCALE: 1/8" = 1'-0" DATE: 09/12/2026
REV: 2 ADDENDUM 1: 09/19/2026

SHEET NUMBER
S-101