


ELECTRICAL ROOM 109: MDP, T-1, LP-1, HP-1; SERVICE 400A 480Y/277V FROM PAD-MOUNT XFMR (UTILITY)

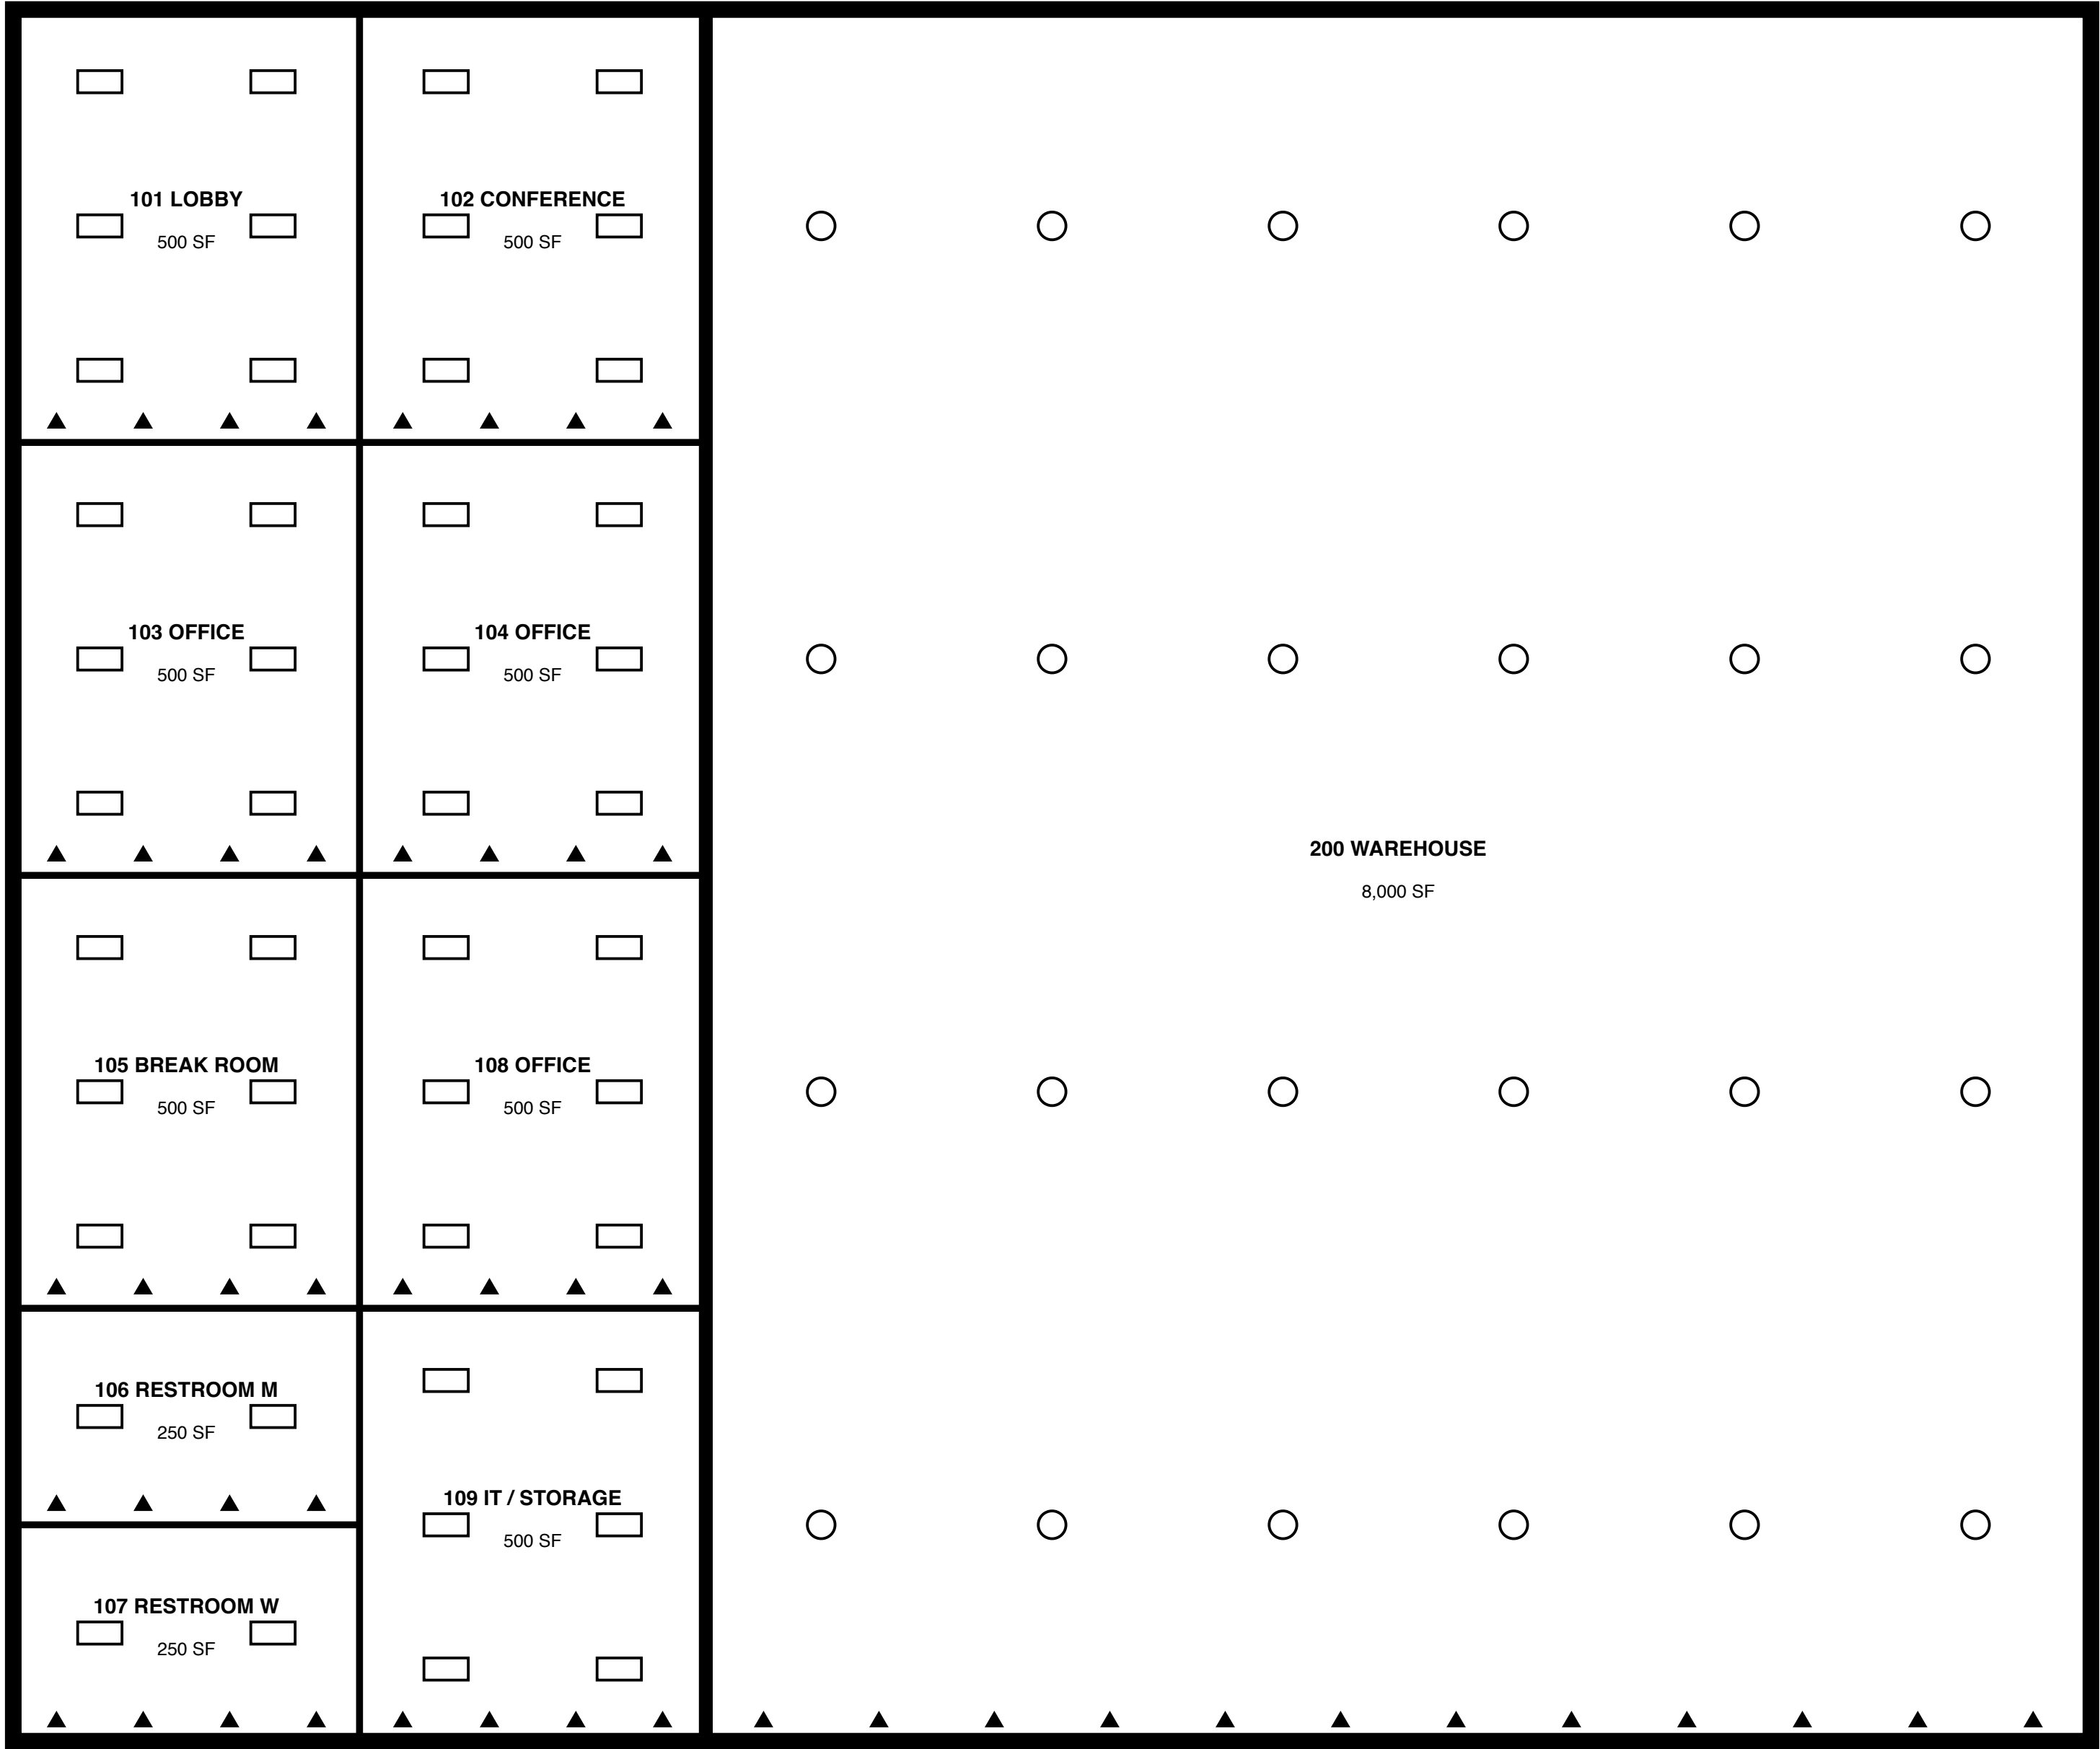

ONE-LINE (TABULAR) / GEAR SCHEDULE

TAG	DESCRIPTION
MDP	400A MAIN DISTRIBUTION PANEL 480Y/277V
T-1	45 KVA TRANSFORMER 480-208Y/120V
LP-1	208Y/120V PANELBOARD, 42 CKT
HP-1	480Y/277V PANELBOARD, 30 CKT

LIGHTING FIXTURE SCHEDULE

TYPE	DESCRIPTION	QTY
A	2x4 LED TROFFER, 4000 LM	40
B	LED HIGH BAY, 20000 LM	24
C	LED WALL PACK, EXTERIOR	8
X	LED EXIT SIGN W/ BATTERY	6

PANEL LP-1 (208Y/120V, 42 CKT) – SUMMARY

CKT	LOAD	BKR
1-9	OFFICE RECEPTACLES (28)	20A/1P
11-15	WAREHOUSE RECEPTACLES (12)	20A/1P
17-19	RESTROOM/BREAK RECEPTACLES (8)	20A/1P
21	WH-1	30A/2P
23-25	EF-1, EF-2, UH-1, UH-2	20A/1P
27-29	FACP, IT RACK	20A/1P
SPARE	12 SPARES	-

PANEL HP-1 (480Y/277V, 30 CKT) – SUMMARY


CKT	LOAD	BKR
1-3	RTU-1 (35 FLA)	50A/3P
5-7	RTU-2 (35 FLA)	50A/3P
9-11	OFFICE LIGHTING (40 x A)	20A/1P
13-15	WAREHOUSE LIGHTING (24 x B)	20A/1P
17	EXTERIOR LIGHTING (8 x C)	20A/1P
19	T-1 45 KVA	70A/3P

FIRE ALARM DEVICES

DEVICE	QTY
FACP	1
PULL STATION	4
HORN/STROBE	10
SMOKE DETECTOR	6

ELECTRICAL NOTES

- SERVICE: 400A, 480Y/277V, 3PH, 4W; UTILITY PAD-MOUNT TRANSFORMER AND PRIMARY BY ONCOR (NIC).
- RECEPTACLES: 48 DUPLEX 20A; DATA OUTLETS: 24 (RACEWAY AND BOXES ONLY; CABLING BY OWNER).
- BRANCH CIRCUITS 3/4" EMT WITH THHN; FEEDERS PER ONE-LINE; APPROX. 3,400 LF CONDUIT.
- LIGHTING CONTROLS: OCCUPANCY SENSORS IN ALL OFFICES; PHOTOCELL/TIMECLOCK FOR EXTERIOR.
- FIRE ALARM: ADDRESSABLE, MONITORED; SPRINKLER FLOW/TAMPER SUPERVISION.

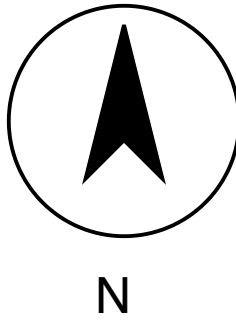

BLACKLAND COMMERCIAL BUILDERS (SYNTHETIC D
PRAIRIE CREEK OFFICE/WAREHOUSE – BUILDING 2

SHEET TITLE
POWER & LIGHTING PLAN, ONE-LINE, PANEL

SCALE: 1/8" = 1'-0" DATE: 09/12/2026
REV: 2 ADDENDUM 1: 09/19/2026

SHEET NUMBER
E-101