


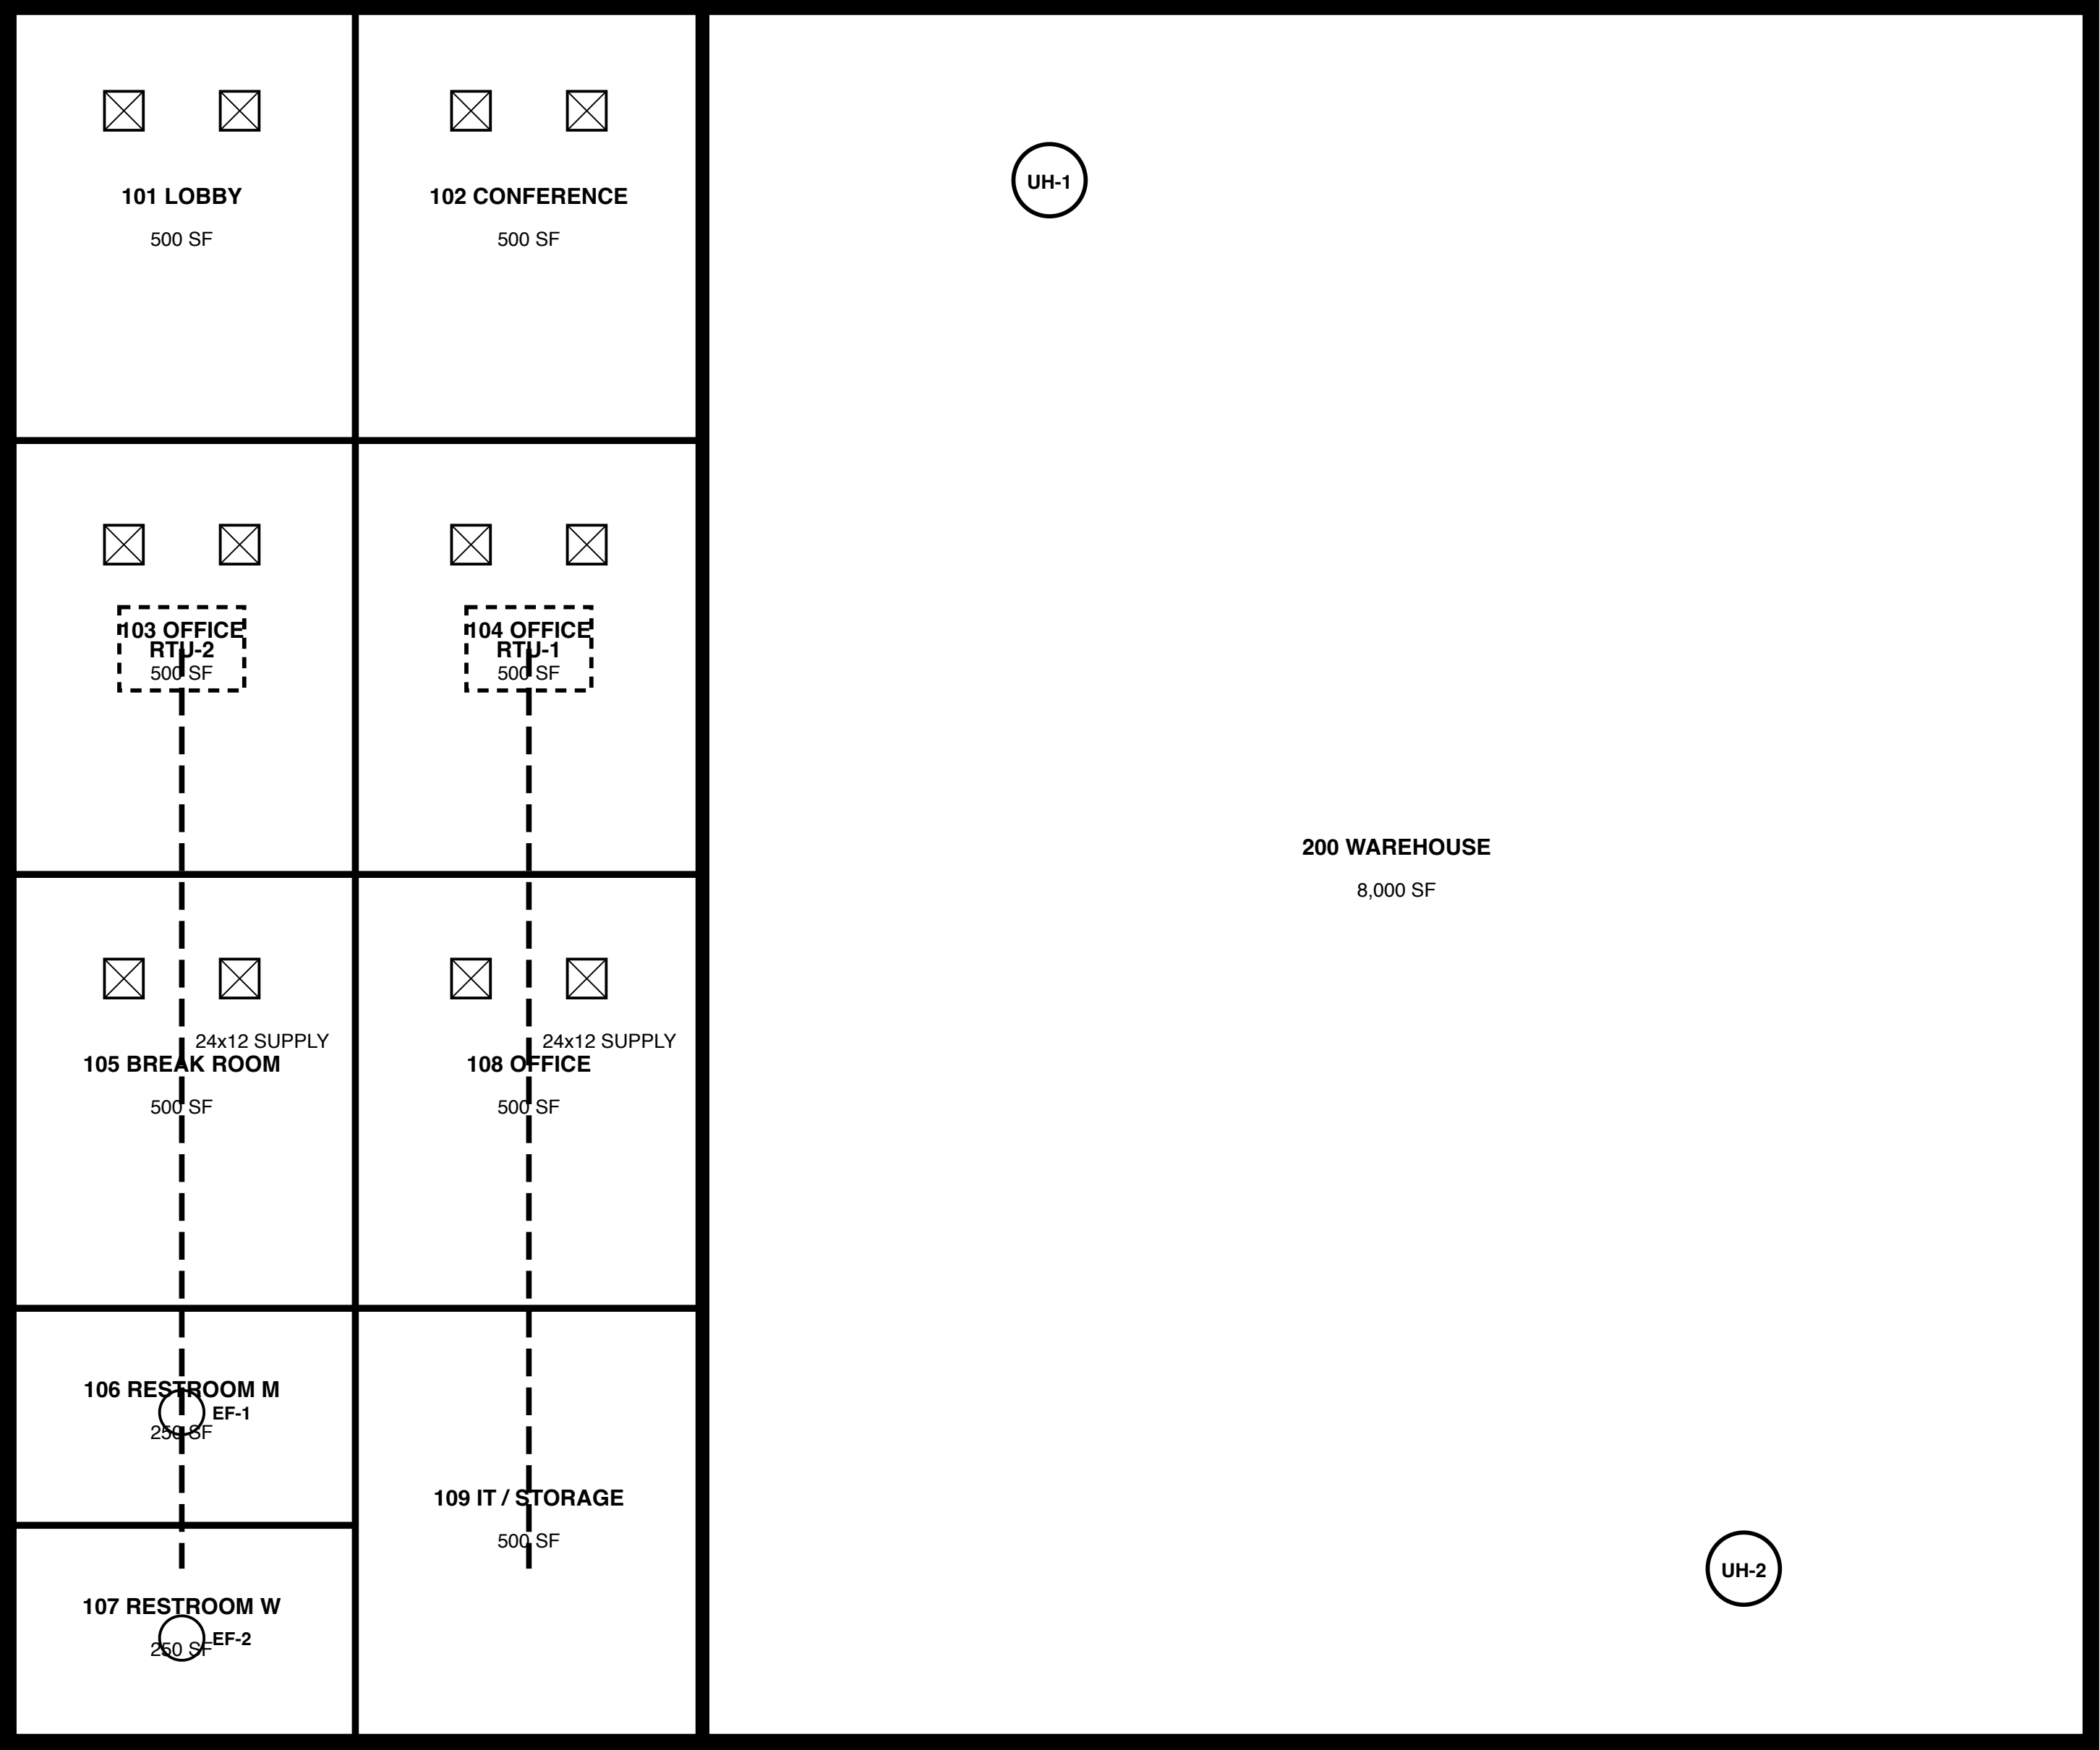

HVAC EQUIPMENT SCHEDULE

TAG	TYPE	CAPACITY	ELECTRICAL	LOCATION
RTU-1	PACKAGED ROOFTOP UNIT	7.5 TON / 3000 CFM	460V/3PH	OFFICE EAST
RTU-2	PACKAGED ROOFTOP UNIT	7.5 TON / 3000 CFM	460V/3PH	OFFICE WEST
UH-1	GAS UNIT HEATER	150 MBH	120V/1PH	WAREHOUSE
UH-2	GAS UNIT HEATER	150 MBH	120V/1PH	WAREHOUSE
EF-1	CEILING EXHAUST FAN	150 CFM	120V/1PH	RESTROOM 106
EF-2	CEILING EXHAUST FAN	150 CFM	120V/1PH	RESTROOM 107

MECHANICAL NOTES

1. SUPPLY DIFFUSERS: 24x24 LAY-IN, QTY 12; RETURN GRILLES 24x24 QTY 6 (NOT SHOWN).
2. DUCTWORK: GALVANIZED, SMACNA 2" WG; LINED 10' FROM RTUs; APPROX. 640 LF TRUNK/BRANCH.
3. GAS PIPING TO UH-1, UH-2 AND WH-1 BY PLUMBING CONTRACTOR; SEE P-101.
4. CONTROLS: PROGRAMMABLE THERMOSTATS; NO BMS. TAB PER 23 05 93.
5. ROOF CURBS 14" BY MECHANICAL CONTRACTOR; STRUCTURAL FRAMES BY STEEL FABRICATOR (S-201).

BLACKLAND COMMERCIAL BUILDERS (SYNTHETIC D	
PRAIRIE CREEK OFFICE/WAREHOUSE — BUILDING 2	
SHEET TITLE HVAC PLAN & SCHEDULES	
SCALE: 1/8" = 1'-0"	DATE: 09/12/2026
REV: 2 ADDENDUM 1: 09/19/2026	
SHEET NUMBER	M-101