



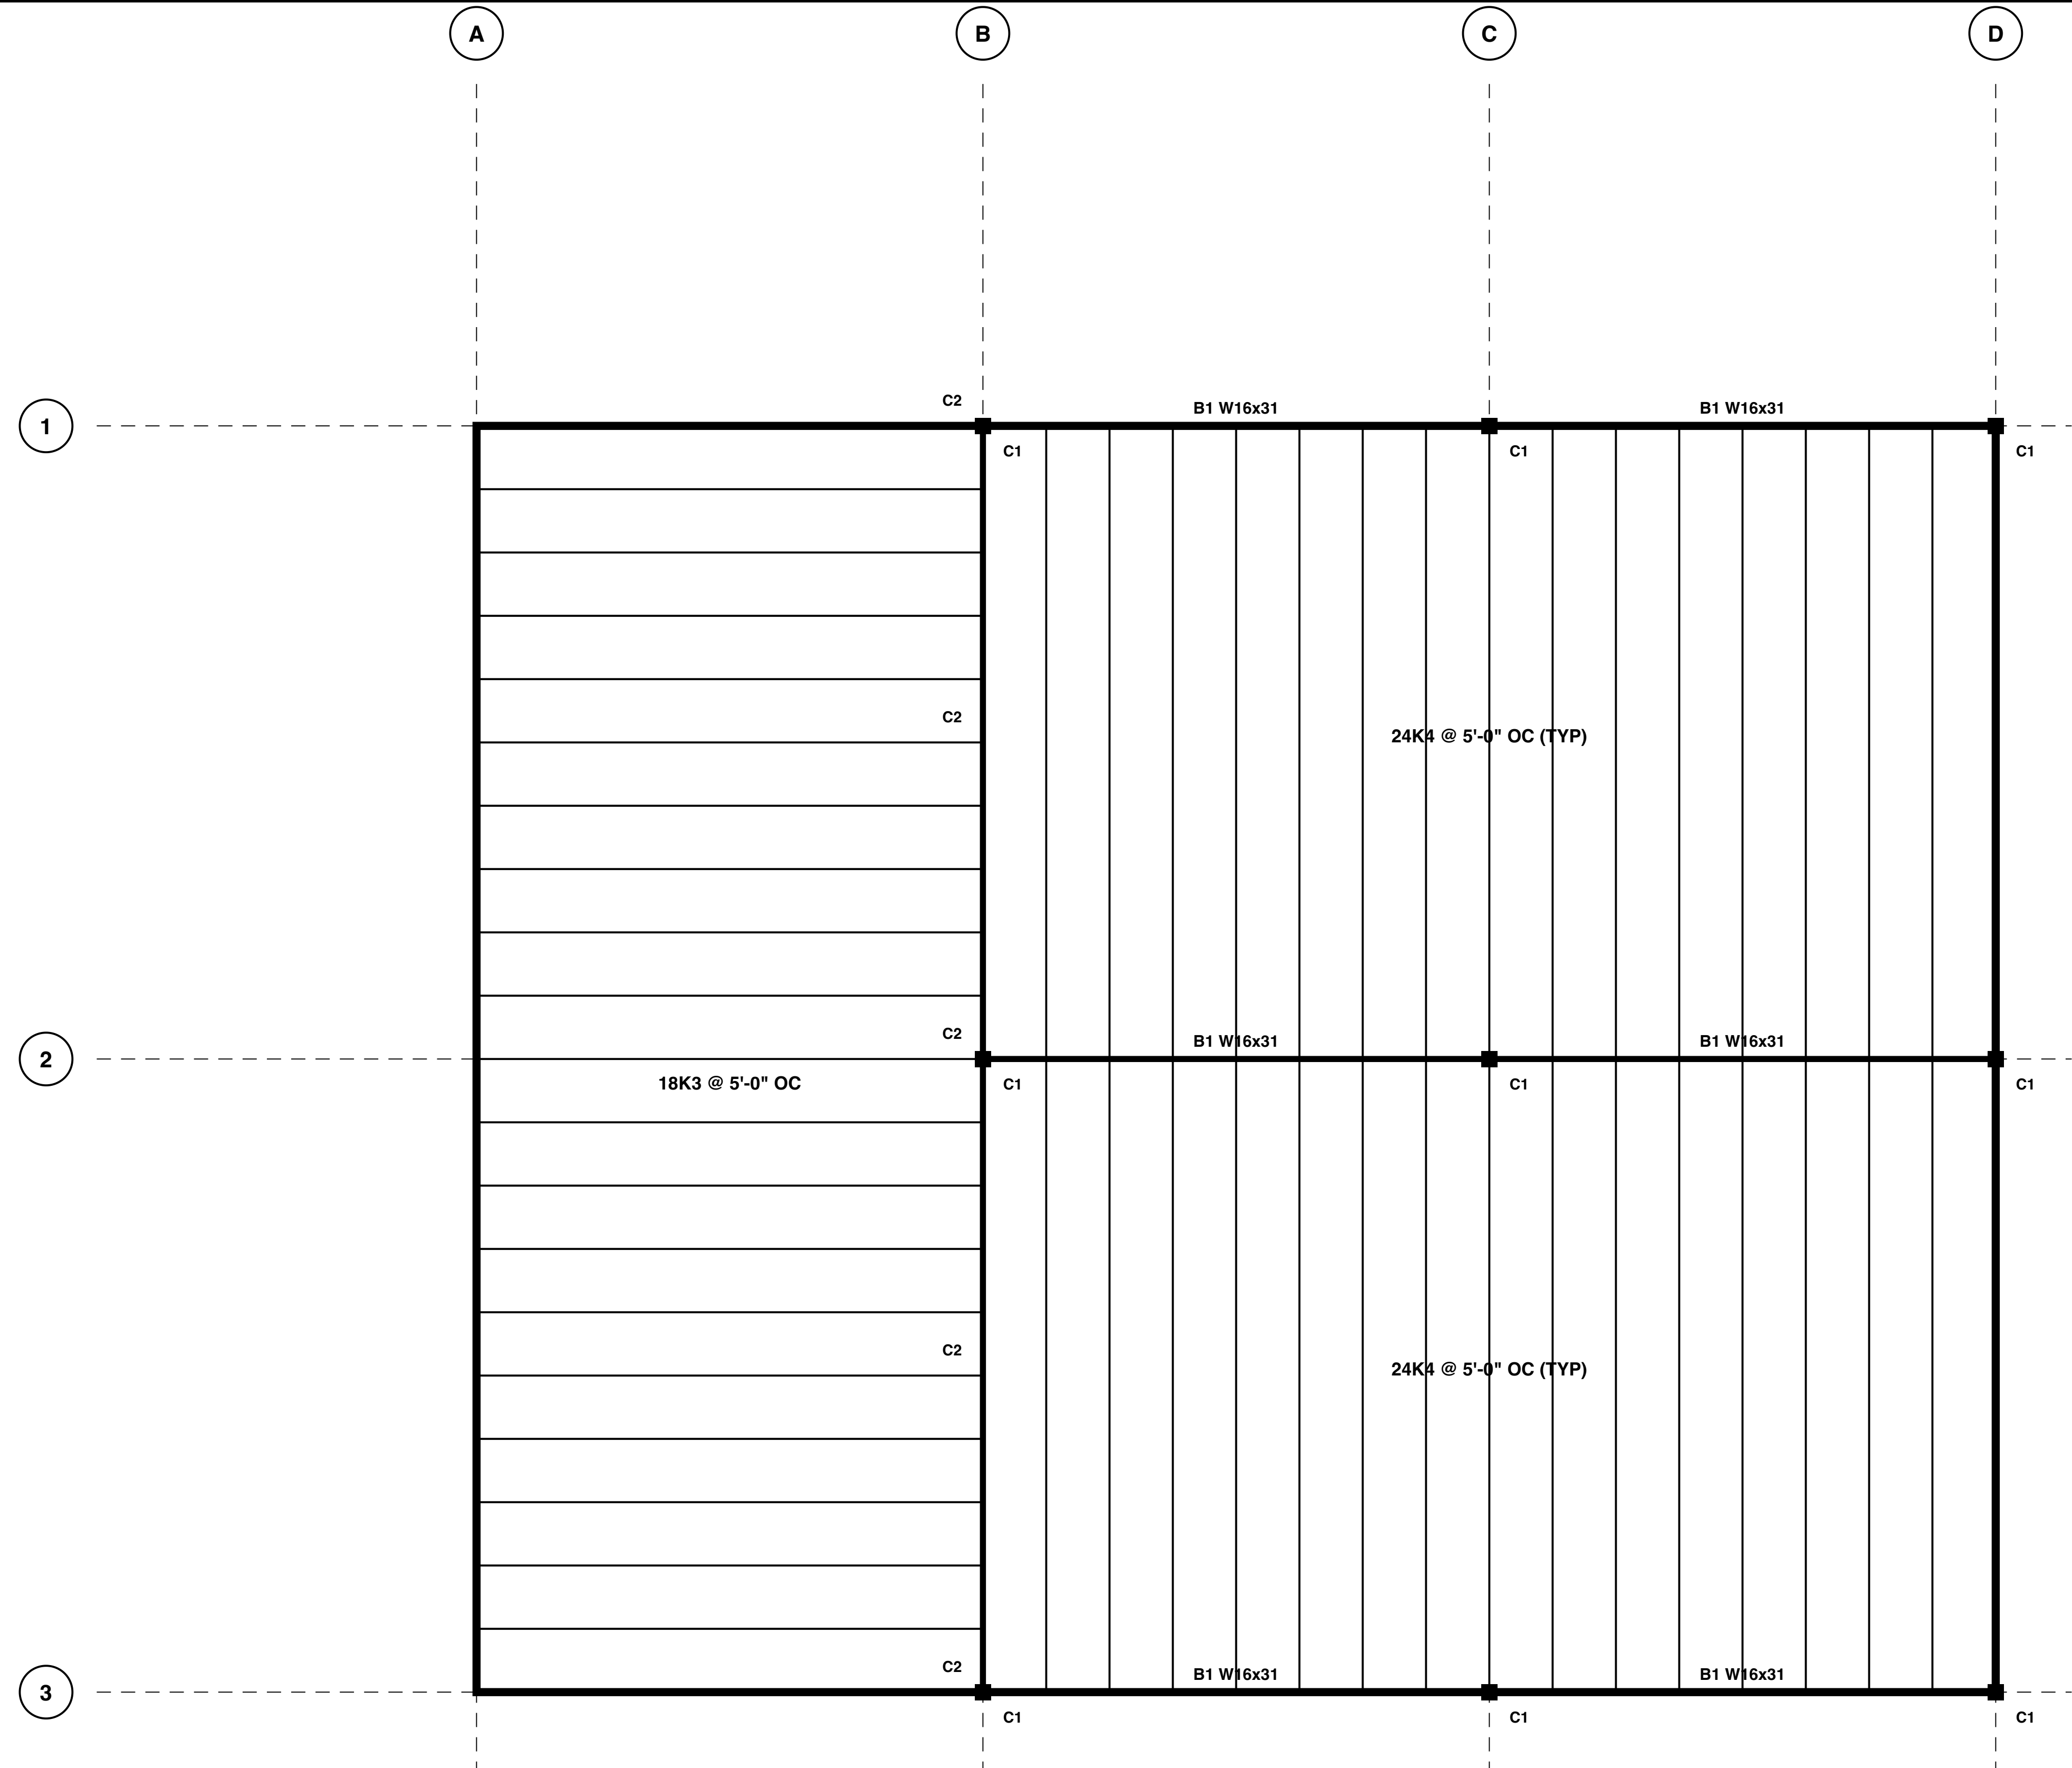

FRAMING NOTES

- 1. ROOF DECK 1-1/2" TYPE B 22 GA GALVANIZED, 36/4 PATTERN, WELDED; 12,000 SF TOTAL.
- 2. JOIST BRIDGING PER SJI; BEARING PLATES AT CMU WALLS.
- 3. BEAMS B1 SIMPLE SHEAR CONNECTIONS, 3/4" A325 BOLTS; CONNECTION DESIGN BY FABRICATOR.
- 4. COLUMNS C1 HSS8x8x1/4 x 24'-0" (9); C2 HSS6x6x1/4 x 14'-0" (5) AT GRID B.
- 5. ROOF SCREENS AND RTU FRAMES: PROVIDE ANGLE FRAMES AT RTU-1 AND RTU-2 CURBS.

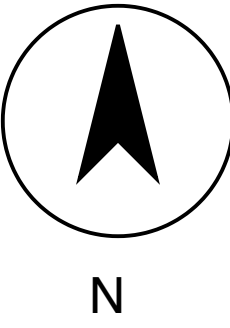

STEEL SCHEDULE

| MARK | SECTION    | LENGTH | QTY | PLF  |
|------|------------|--------|-----|------|
| B1   | W16x31     | 40'-0" | 6   | 31.0 |
| J1   | 24K4       | 50'-0" | 32  | 8.4  |
| J2   | 18K3       | 40'-0" | 21  | 6.6  |
| C1   | HSS8x8x1/4 | 24'-0" | 9   | 25.8 |
| C2   | HSS6x6x1/4 | 14'-0" | 5   | 19.0 |

ROOF DECK

| AREA      | DECK                | SF    |
|-----------|---------------------|-------|
| WAREHOUSE | 1-1/2" TYPE B 22 GA | 8,000 |
| OFFICE    | 1-1/2" TYPE B 22 GA | 4,000 |

BLACKLAND COMMERCIAL BUILDERS (SYNTHETIC DRAINAGE)  
PRAIRIE CREEK OFFICE/WAREHOUSE — BUILDING 2

SHEET TITLE  
ROOF FRAMING PLAN

SCALE: 1/8" = 1'-0"      DATE: 09/12/2026  
REV: 2 ADDENDUM 1: 09/19/2026

SHEET NUMBER  
S-201